

SOLID Bifacial

60 cell

Frameless _ Glass/Glass _ Transparent




Self-cleaning effect




10 500 Pa
Extreme load resistance



Fire class A



Salt mist resistance



Ammonia resistance



35% of recycled glass content



98% recyclable



39 mm
Hail resistance



Positive sorting up to +5W

Front side ⚡ 370 W

30 Year product warranty



87% Power warranty

30 Year efficiency warranty

| Electrical data (STC*) | |
|--------------------------------------|----------|
| Maximum power (W) | 370 |
| Cell technology | Bifacial |
| Open circuit voltage (V_{oc}/V) | 40,50 |
| Short circuit current (I_{sc}/A) | 11,18 |
| Max power voltage (V_{mpp}/V) | 34,86 |
| Max power current (I_{mpp}/A) | 10,62 |
| Module efficiency (η) | 19,92% |
| Max system voltage (V) | 1000 |
| Max current (A) | 15 |
| Power tolerance | 0/+5W |

*Under standard test conditions (STC) of irradiance of 1000W/sq.m., spectrum AM1.5 and cell temperature of 25°C. Flash testing measurement accuracy of +/-5%.

| Warranty | |
|------------------------------|--------|
| 30 years product warranty | |
| 30 years efficiency warranty | |
| First year degradation (%) | 2% |
| Annual degradation (%) | 0.379% |
| Power in year 30 (%) | 87% |

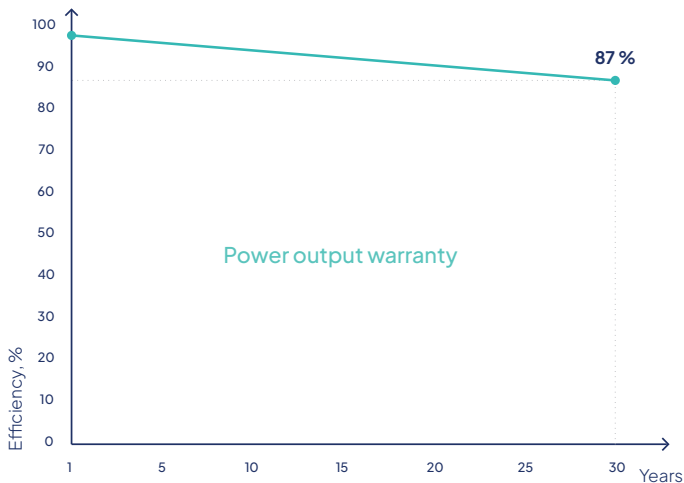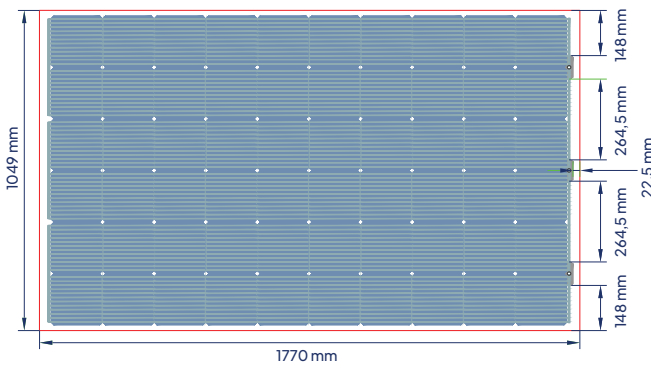

| Temperature ratings | |
|--|---------------------------|
| Current temperature coefficient (α) | +0.036% / °C |
| Voltage temperature coefficient (β) | -0.265% / °C |
| Power temperature coefficient (δ) | -0.362% / °C |
| Nominal operating module temperature | 46 °C |
| Mechanical data | |
| Dimensions (LxWxH) (mm) | 1770x1049x7.1 |
| Dimensions with edge sealing (LxWxH) (mm) | 1778±5x1057±5x7.1 |
| Weight (kg) | 30 |
| Front glass (mm) | 3 |
| Back glass (mm) | 3, transparent |
| Cell Size (mm) | 166x166 |
| Busbars | 9 |
| Cell configuration | 6x10 |
| Frame | Frameless |
| Rated operating altitude | Up to 2000 m |
| Operating temperature (°C) | -40 ÷ +85 |
| Maximum test load (wind/snow) (Pa) | 5400/10500 |
| Junction box / IP class | Split junction box / IP68 |
| Cable cross section size (mm ²) | 4 |
| Cable length | 1,2 m |
| Bypass diodes | 3 |
| Connector | MC4 compatible |

| Packing information | |
|--------------------------------|-------------------|
| Modules per pallet | 25 pcs |
| Dimensions of a pallet (LxWxH) | 1900x1170x1070 mm |
| Weight of a pallet (gross) | 855 kg |
| Pallets per 13.6 m truck | 28 pcs |
| Modules per 13.6 m truck | 700 pcs |

| Certifications | |
|---|----------------------------------|
| IEC 61215:2021; IEC 61730:2016; UL 61730:2017 | |
| Cradle to Cradle (C2C) | Silver level |
| IEC 62716:2013 | Ammonia corrosion testing |
| IEC 61701:2020 | Salt mist corrosion testing |
| IEC 61215-2:2016 | Hailstone (39 mm) |
| ISO 9001:2015 | Quality management systems |
| ISO 14001:2015 | Environmental management systems |
| ISO 45001:2018 | Occupational health and safety |
| SundaHus | A level assessment |
| Produced using 100% renewable energy | |
| Membership at Svensk Solenergi | |



This datasheet is not legally binding. The manufacturer reserves the right to make changes to product specifications and / or product features without prior notice. The most recent versions of all documents (T&C's, datasheets, warranties and installation manuals) can always be found on our website at www.solitek.eu

